

**GALLO
ACOUSTICS**



Micro



SPECIFICATIONS

Frequency Response:

On wall, ceiling or floor stand

On Tabletop

Sensitivity:

Nominal Impedance:

Power Handling:

Height on Floor Stand

Driver:

Crossover

Dimensions:

Weight:

Cone Material:

Enclosure Material:

Warranty:

100Hz to 18Khz

120Hz to 18Khz

889dB/w 2,8 X (1M)

8 Ohms

100 Wats

94 cm

3 "full range

None


4" Sphere

963 gr

Mical Polyprohylene Compound

Mild Steel

5 Years Parts and Labour

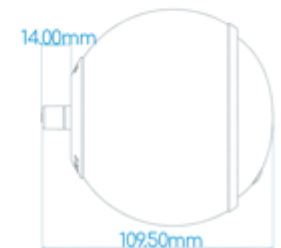


Micro SE



SPECIFICATIONS

Frequency Response:	100Hz to 22Khz
On wall or floor stand	120Hz to 22Khz
On Tabletop	85dB/w 2,83 X (1M)
Sensitivity:	4 Ohms
Nominal Impedance:	125 Wats
Power Handling:	91,5 cm
Height on Floor Stand	3"wide-dispersion flat diaphragm
Driver:	None
Crossover	4" Sphere
Dimensions:	737 gr
Weight:	Aluminium Hoeycomb Sandwich
Cone Material:	Mild Steel / Stainless Steel
Enclosure Material:	5 Years Parts and Labour
Warranty:	




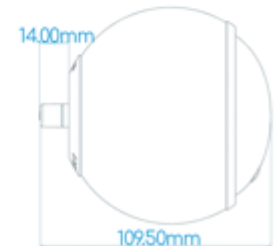


A'Diva



SPECIFICATIONS

Frequency Response:	
On wall	76Hz to 20Khz
On floor stand	95Hz to 20Khz
Sensitivity:	88 dB/w
Nominal Impedance:	8 Ohms
Power Handling:	
Full range	50 Watts
Crossover	100 Watts
Height on Floor Stand	37"
Driver:	3" full range
Crossover	None
Dimensions:	5" Sphere
Weight:	1.6kg
Cone Material:	Mical Polypropylene Compound
Enclosure Material:	Mild Steel
Warranty:	5 Years Parts and Labour

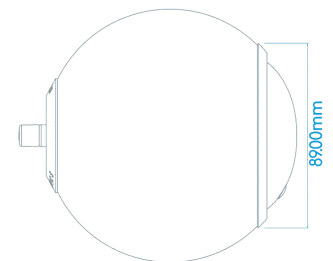
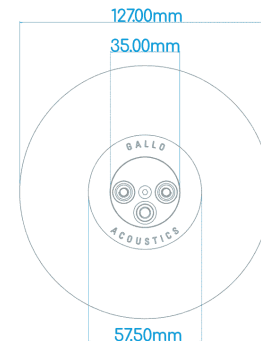

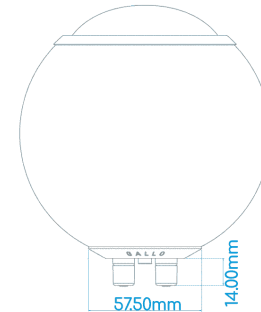


A'Diva SE



SPECIFICATIONS

Frequency Response:	
On wall	20Hz to 20Khz
On floor stand	100Hz to 20Khz
Sensitivity:	88 dB/w 2,8 X (1M)
Nominal Impedance:	4 Ohms
Power Handling:	
Full range	60 Watts
Crossover	125 Watts
Height on Floor Stand	94 cm
Driver:	3"wide-dispersion flat diaphragm
Crossover	None
Dimensions:	5" Sphere
Weight:	963 gr
Cone Material:	Aluminium Honeycomb Sandwich
Enclosure Material:	Mild Steel
Warranty:	5 Years Parts and Labour

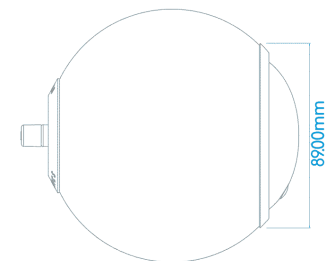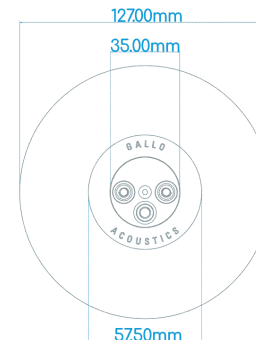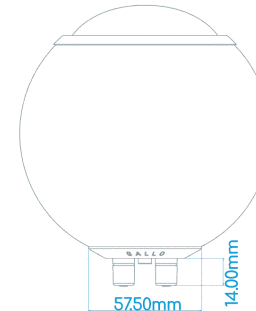



Micro



Micro SE



A'Diva



A'Diva SE



SPECIFICATIONS




Droplet:

Micro 1175 gr


Mirco SE 1175 gr

A'Diva 1485 gr

A'Diva SE : 1485 gr

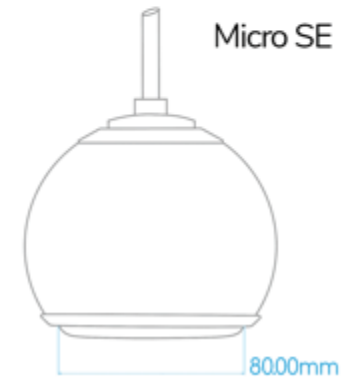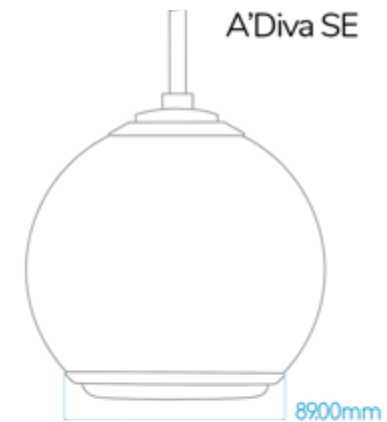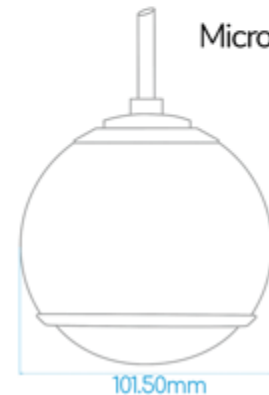


Strada2

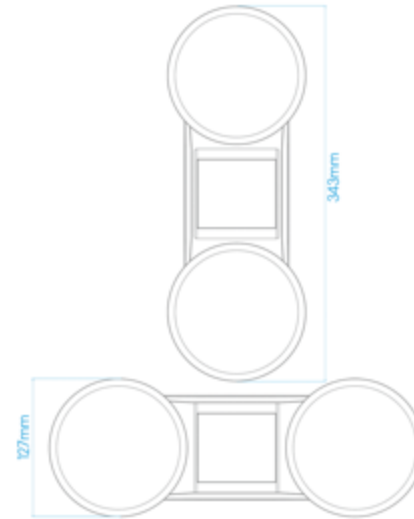

SPECIFICATIONS

Frequency Response	68Hz to 20kHz +/- 3db (in room with boundary reinforcement, speakers within 1 foot of wall)
Sensitivity	90 dB/1 Watt/1 meter
Nominal Impedance	8 Ohms
Power Handling	150 Watts RMS unclipped music power. Minimum suggested power 10 Watts RMS.
Finishes	Brushed stainless steel spheres with a black frame.
Tweeter	Patented CDT3 (Cylindrical Diaphragm Transducer) sporting 180° horizontal dispersion from 6kHz to above 20kHz.
Woofers	Two 4" dynamic hyperbolic carbon fibre drivers optimised to integrate seamlessly with the CDT3 tweeter without the need for a crossover.
Crossovers	None
Enclosure Type	Sealed with Auxiliary Bass Cavity Supplementation and Patented S2 loading.
Dimensions	127mm (W) x 343mm (H) x 191mm (D)
Weight	5.2kg
Connections	5 way gold plated binding posts.
Enclosure Material	Powder coated cast aluminium chassis with brushed stainless steel spheres and powder coated stainless steel grilles.
Warranty	5 Years Parts and Labour


Profilesub

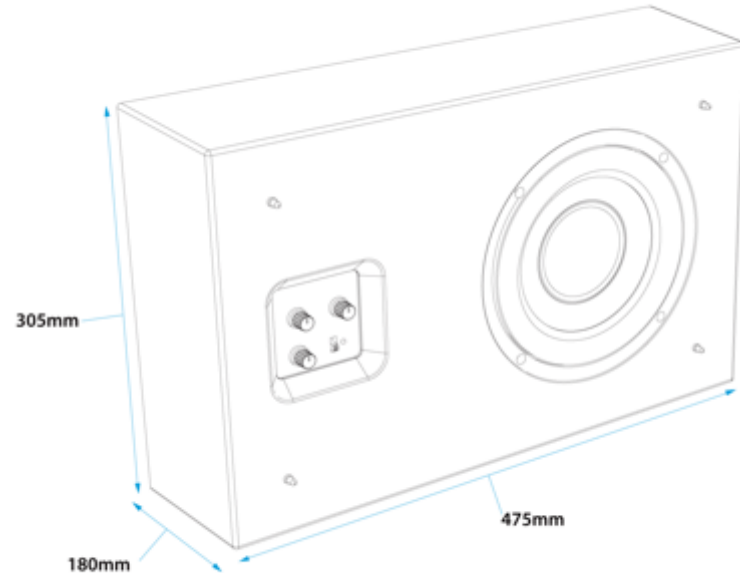

SPECIFICATIONS

Frequency Response	32Hz – 220Hz +/- 3db
Digital Power Amp	150 Watts
Woofer	8" woofer with PP cone and NBR surround
Phase	0 – 180° continuously variable
Active low pass filter	50 to 180Hz, continuously variable
Power	Auto/On/Off: toggle switch
Dimensions	475mm (W) x 305mm (H) x 180mm (D)
Weight	10.5kg
Enclosure Material	MDF (Medium Density Fibreboard)
Connectors	2 female RCA phono inputs
Warranty	2 Years Parts and Labour

TR-3D Subwoofer

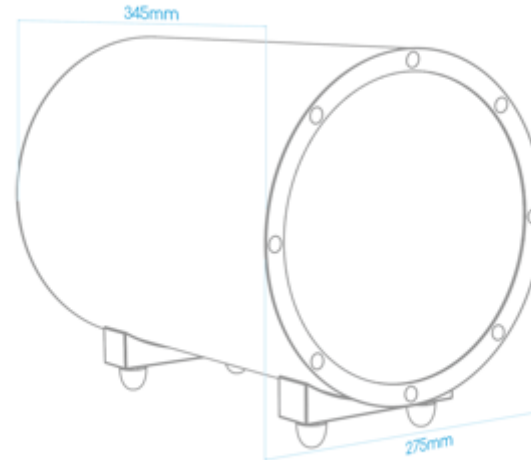

SPECIFICATIONS

In-room frequency response	18Hz – 180Hz +/- 3db
Digital power amp	300 Watts RMS, 600 Watts max.
Phase	0/180 switch
Low pass	50 to 180Hz, continuously variable with LFE by-pass switch
High pass	100Hz fixed, 1st order on high-level output
Bass EQ	0, +3dB, +6dB 25 Hz center frequency
Power	Auto/On/Off: toggle Switch
Dimensions:	275mm (W) x 305mm (H) x 345mm (D)
Enclosure type	Hardened steel with S2 Bass loading
Connections	2 female RCA phono inputs and 2 female RCA phono outputs (pass-thru) 5-way gold plated binding posts
Woofers	10" long throw ceramic coated aluminum
Warranty	2 Years Parts and Labour